


## Download Free Cisco 300-810 Real Exam Questions Download [Q69-Q84]



Download Free Cisco 300-810 Real Exam Questions Download  
Latest Cisco 300-810 Real Exam Dumps PDF

**NO.69** Refer to the exhibit. Which action allows a remote Cisco Jabber user utilizing Mobile and Remote Access to automatically log in to a Cisco Unity Connection voicemail box via OAuth?

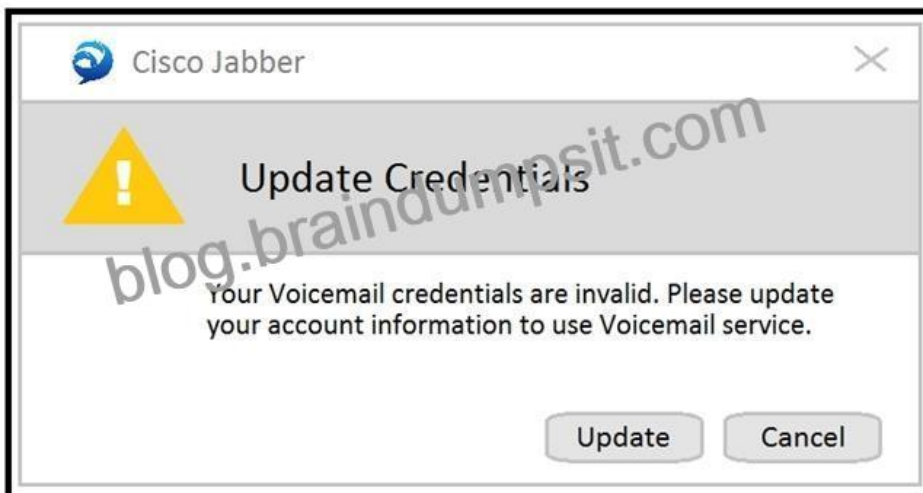

- \* Add CUCM under System Settings > Authz Servers in Cisco Expressway-E.
- \* Add CUCM under System Settings > Authz Servers in Cisco Expressway-C.
- \* Add CUCM under System Settings > Authz Servers in Cisco Unity.
- \* Add CUCM under System Settings > Authz Servers in Cisco Unity Connection.

<https://community.cisco.com/t5/unified-communications/jabber-mra-unity-voice-mail-integration-issue/td-p/3195653>

**NO.70** Which HTTP response code does Cisco UCM use to redirect a client to the identity provider for authentication?

- \* 300
- \* 301
- \* 304
- \* 302

[https://www.cisco.com/c/en/us/td/docs/voice\\_ip\\_comm/cucm/SAML\\_SSO\\_deployment\\_guide/12\\_](https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/SAML_SSO_deployment_guide/12_)

[5\\_1/cucm\\_b\\_saml-ss0-deployment-guide-12\\_5/cucm\\_b\\_saml-ss0-deployment-guide-](#)

[12\\_5\\_chapter\\_01.html](#)

**NO.71** To redirect calls from the phone extension for user A to the voicemail greeting, which call routing rule should be used in Cisco Unity Connection?

- \* Attempt Forward forwarded routing rule
- \* Opening Greeting direct routing rule
- \* Attempt Sign-In direct routing rule
- \* Opening Greeting forwarded routing rule

Explanation/Reference: <https://community.cisco.com/t5/collaboration-voice-and-video/unity-connection-call-routing-logic/ta-p/3162560>

**NO.72** Refer to the exhibit.

```
---Log snippet---  
  
2018-12-27 11:02:05, 430 INFO [0x0000015c]  
[rc\dnsutils\win32\win32DnsUtils.cpp(343)] [csf.dns]  
[csf::dns::DnsUtils::executeSRVRecordQuery] - About to make DNS SRV record query  
'_cisco-uds._tcp.example.com.'  
2018-12-27 11:02:05, 430 WARN [0x0000015c]  
[src\dnsutils\win32\win32DnsUtils.cpp(52)] [csf.dns]  
[csf::dns::mapFromWindowsDNSResult] - *-----* DNS query _cisco-  
uds._tcp.example.com. has failed: DNS name does not exist.  
(9003).  
2018-12-27 11:02:05, 430 INFO [0x0000015c]  
[rc\dnsutils\win32\win32DnsUtils.cpp(343)] [csf.dns]  
[csf::dns::DnsUtils::executeSRVRecordQuery] - About to make DNS SRV record query  
'_cuplogin._tcp.example.com.'  
2018-12-27 11:02:05, 435 WARN [0x0000015c]  
[src\dnsutils\win32\win32DnsUtils.cpp(52)] [csf.dns]  
[csf::dns::mapFromWindowsDNSResult] - *-----* DNS query  
_cuplogin._tcp.example.com. has failed: DNS name does not exist.  
(9003).
```

Troubleshooting an internal Jabber login issue and you see this logging snippet from the Jabber PRT file. You already checked that the Jabber client has a connection to the correct DNS server. Which DNS record is missing for service discovery of Cisco Unified Communications Manager for the login process to proceed further?

- \* A record for the Cisco Unified Communications Manager
- \* SRV record \_cisco-uds.\_tcp.example.com
- \* A record \_cuplogin.\_tcp.example.com
- \* SRV record \_cuplogin.\_tcp.example.com

**NO.73** After integrating Cisco Unity Express with Cisco Unified Communications Manager Express, users report that the system does not respond to their digit presses. Which two configuration snippets resolve this issue? (Choose two.)

- \* dial-peer voice 6800 voip destination-pattern 5&#8230; session protocol sipv2 session target ipv4:10.3.6.127 dtmf-relay sip-kpml codec g729r8
- \* dial-peer voice 6800 voip destination-pattern 5&#8230; session protocol sipv2 session target ipv4:10.3.6.127 dtmf-relay sip-notify codec g711ulaw
- \* dial-peer voice 6800 voip destination-pattern 5&#8230; session protocol sipv2 session target ipv4:10.3.6.127 dtmf-relay rtp-nte codec g711ulaw
- \* dial-peer voice 6800 voip destination-pattern 5&#8230; session protocol sipv2 session target ipv4:10.3.6.127 dtmf-relay sip-kpml codec g711ulaw
- \* dial-peer voice 6800 voip destination-pattern 5&#8230; session protocol sipv2 session target ipv4:10.3.6.127 dtmf-relay sip-notify codec g729r8

**NO.74** Refer to the exhibit.



Users report that they cannot see the Chat Rooms icon on their Cisco Jabber clients. This feature works without issue in the lab. An engineer reviews the Cisco IM&P and Jabber configuration and finds that the jabber-config.xml file is configured properly to support this feature. Which activity should be performed on the IM&P server to resolve this issue?

- \* Activate Cisco XCP Connection Manager in Cisco Unified Serviceability > Tools > Service Activation.
- \* Restart Cisco XCP Message Archiver in Cisco Unified Serviceability > Tools > Control Center &#8211; Feature Services.
- \* Restart XCP Text Conference Manager in Cisco Unified Serviceability > Tools > Control Center &#8211; Network Services.
- \* Activate XCP Text Conference Manager in Cisco Unified Serviceability > Tools > Service Activation.

Explanation/Reference: <https://www.cisco.com/c/en/us/support/docs/unified-communications/jabber-windows/118684-probsol-chat-00.html>

**NO.75** An engineer is configuring toll fraud prevention on a Cisco Unity Connection system. The Unity Connection system is integrated with two phone systems each with its own trunk access code Which figuration blocks attempts to bypass the restriction

table by dialing trunk access codes?

- \* Add restriction table patterns to match applicable trunk access codes for both phone system integrations
- \* Restrict the numbers that can be used for system transfers
- \* Set up all restriction tables to block calls to the international operator
- \* Set up restriction tables to block all calls to international numbers.

Toll fraud prevention on Cisco Unity Connection often involves restriction tables, which define patterns of phone numbers that are allowed or disallowed. To prevent users from dialing out using trunk access codes and potentially making unauthorized long-distance calls, here's the logic:

\* Identify trunk access codes: Determine the specific codes that allow external calls on each phone system. These are often single-digit codes like 9 and 8221;

\* Add patterns to restriction tables: Within the Cisco Unity Connection restriction tables, create patterns that block any number starting with the trunk access code for each respective phone system.

**NO.76** Refer to the exhibit. Persistent Chat is configured in the Cisco IM and Presence server using PostgreSQL as the back-end database. Users report that the Chat Rooms icon is missing from their Cisco Jabber clients. Which action should the administrator take to resolve this issue?



- \* Start the Cisco XCP Message Archiver.
- \* Start the Cisco XCP Text Conference Manager.
- \* Restart the Cisco XCP Directory Service
- \* Restart the Cisco XCP XMPP Federation Connection Manager.

**NO.77** Cisco Jabber uses which protocol for chat features in desk phone control mode?

- \* CTIQBE
- \* HTTP
- \* XMPP
- \* SIP/SIMPLE

**NO.78** An engineer needs to configure the cisco unity connection Auto-attendant feature to transfer calls to a specific destination, maintain control of the transfer, and take a defined administrative action upon failure. How is this accomplished?

- \* Consult Transfer

- \* Supervised Transfer
- \* Release to Switch
- \* HookFlash Transfer

**NO.79** Which dial-peer configuration routes calls from SIP-based phones on Cisco Unified Communications Manager Express to Cisco Unity Express?

- \* dial-peer voice 7000 voip destination-pattern 7000 session protocol sipv2 session target ipv4: 10.3.6.127 codec g711alaw
- \* dial-peer voice 7000 voip destination-pattern 7000 session protocol sipv2 session target ipv4: 10.3.6.127 codec ilbc
- \* dial-peer voice 7000 voip destination-pattern 7000 session protocol sipv2 session target ipv4: 10.3.6.127 codec g711ulaw
- \* dial-peer voice 7000 voip destination-pattern 7000 session protocol sipv2 session target ipv4: 10.3.6.127 codec g729r6

**NO.80** An end user opened a ticket, stating that though he can log in to Jabber for Windows, and presence and chat works, he cannot place phone calls using the desktop client. You investigate the user and find that no phone device is associated with the user account in Cisco Unified Communications Manager. Which device type must you create for this user to enable calling services from the Jabber for Windows desktop client?

- \* Cisco Unified Personal Communicator
- \* Cisco Jabber for Tablet
- \* Cisco Unified Client Services Framework
- \* third-party SIP device (advanced)

Explanation

[https://www.cisco.com/c/en/us/td/docs/voice\\_ip\\_comm/jabber/11\\_5/CJAB\\_BK\\_D00D8CBD\\_00\\_deployment-in](https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/jabber/11_5/CJAB_BK_D00D8CBD_00_deployment-in)

**NO.81** Which option is a prerequisite for selecting a third-party IdP for Cisco Collaboration?

- \* SAML1.1
- \* SAML2.0
- \* SAML1.0
- \* LDAP

**NO.82** Which two child elements can be in an XMPP message stanza? (Choose two.)

- \* <server/>
- \* <error/>
- \* <client/>
- \* <body/>
- \* <subject/>

Explanation/Reference:

**NO.83** Which SAML component describes the packaging of the SAML elements?

- \* bindings
- \* profiles
- \* assertions
- \* protocols

**NO.84** Drag and Drop Question

Drag and drop the steps for SAML SSO authentication from the left into the order on the right.

The client attempts to access a resource.	step 1
The client sends an authentication request to an IdP.	step 2
The client sends a signed response to the service provider.	step 3
The IdP authenticates the client by using a signed response.	step 4
The service provider redirects the client to the IdP.	step 5

The client attempts to access a resource.
The service provider redirects the client to the IdP.
The client sends an authentication request to an IdP.
The IdP authenticates the client by using a signed response.
The client sends a signed response to the service provider.

PDF (New 2025) Actual Cisco 300-810 Exam Questions: [https://www.braindumpsit.com/300-810\\_real-exam.html](https://www.braindumpsit.com/300-810_real-exam.html)